



# Monteringsvejledning / Installation instructions

## INDUSTRIA IP65



220-240 VAC	14W 23W 29W	4000 Kelvin	1530 2650 3650 Lumen	CRI>80				
					RoHS			

Nordtronic A/S | Flade Engvej 4 | DK - 9900 Frederikshavn | Denmark  
CVR: 29808708 | Tel: +45 70209531 | [www.nordtronic.com](http://www.nordtronic.com)

# Monteringsvejledning / Installation instructions

## Vigtig information

Armaturet skal monteres af en autoriseret el-installatør. Kontrollér at mærkningen på armaturet stemmer overens med den anvendte spænding, samt installationsmåde og -område. Husk altid at afbryde for gruppeafbryderen inden montering af armaturet. Overskrid aldrig armaturets max. wattage mærkning.

Vær opmærksom på, at lyskilden sidder korrekt i fatningen. Anvend altid kabler af en type, der er godkendt til fast installation efter Stærkstrømsbekendtgørelsens krav og gældende SIK-meddelelser.

## Monteringsvejledning

Kontrollér at armaturet er godkendt til det aktuelle sted, hvor det skal monteres.

Bemærk: Hvis dette armatur bruges sammen med eksterne PIR eller sensorer, bedes du venligst forespørge hos producenten af sensorer, at de er kompatible med LED armaturer.

Vigtigt: Hvis armaturet monteres udenfor, skal ledningskablet tilsluttes til en egnet IP-klassificeret forbindelsesboks.

- Brug monteringsbeslaget som skabelon, og lav huller til montering af armaturet, som anvist på fig. 1.
- Løsne klipsene på begge sider af armaturet (se fig. 2).
- Fjern glasset.
- Fjern dækpladen ved at klemme sammen på de to klippe (se fig. 3).
- Tilslut armaturet efter anvisning på figur 4
- Monter dækpladen, tjek at alle klemmer er fastgjort korrekt, og herefter påsæt glasset igen.
- Armaturet er forberedt til videresløjning, og opretholder IP65 ved brug af medfølgende forskruninger.

## Important information

The lighting fixture must be installed by an authorised electrician. Check that the label on the product matches the utilised voltage and also check the method of installation and area. Always remember to switch off the main power prior to installation of the lighting fixture. Never exceed the wattage label on the product.

## Installation instructions

**Note:** If this luminaire is being used in conjunction with external PIR or sensors, please confirm with the manufacturer of the sensors that they are compatible with LED luminaires

- Provide power to the required point of installation.
- Important: Subject to the surface foundation material, ensure the correct fixings are used. If installed outside, the mains cable should be connected into a suitable IP rated junction box
- Referring to Fig 1, using the mounting brackets as a template, mark the location of the fixing holes. Drill the fixing holes ensuring not to infringe with any joists, gas/water pipes, or electrical cables that may be hidden behind the surface.
- Unfasten clips on either side of the fitting (see Fig 2).
- Remove the diffuser.
- Remove the gear tray by pinching the clips at the two locations (see Fig 3)
- When using as a singular fitting, feed cable through a compression gland (included) at the end of the fitting.
- Connect the Live (brown), Neutral (blue) and Earth (yellow and green) via the 3-way terminal connector (see Fig 4).
- Replace the gear tray and diffuser ensuring all clips are fastened correctly.
- Switch on power supply and check for correct operation

**Note:** This fitting can be linked to another fitting by using the same 3-way terminal connector in Fig 4 and has knock-outs at both ends of the fitting which can be drilled using a 20mm holesaw. The IP65 rating will be maintained when a 20mm compression gland (supplied) is used in the drilled hole.

**Fig 1**



	L (mm)	L (ft)	A1 (mm)
Industria IP65 14W	653 mm	2	390 mm
Industria IP65 23W	1263 mm	4	900 mm
Industria IP65 29W	1563 mm	5	1000 mm

**Fig 2**



Løsen klipsene på begge sider af armaturet  
Unfasten clips on both sides


**Fig 3**



Klem her  
Pinch at these points

**Fig 4**

Fase (brun)  
Live (brown)  
Jord (grøn og gul)  
Earth (green and yellow)  
Nul (blå)  
Neutral (blue)

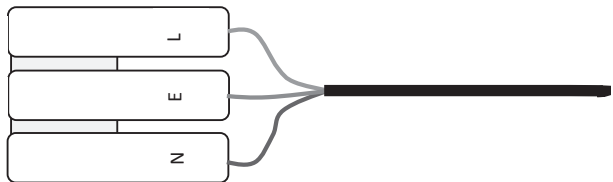



Nordtronic A/S | Flade Engvej 4 | DK - 9900 Frederikshavn | Denmark  
CVR: 29808708 | Tel: +45 70209531 | [www.nordtronic.com](http://www.nordtronic.com)