


MATERIAL
 Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 PCB: FR4, UL 94 V-0 rated

USB Connector:
 Shell: Copper alloy, plated with Tin-Lead
 Plastic: High-impact Polybutylene terephthalate (PBT resin), UL 94 V-0 rated, Glass Filled
 Contact: Copper Alloy, plated with thick hard gold 0.38 μm (15 μin)
 RoHS compliant

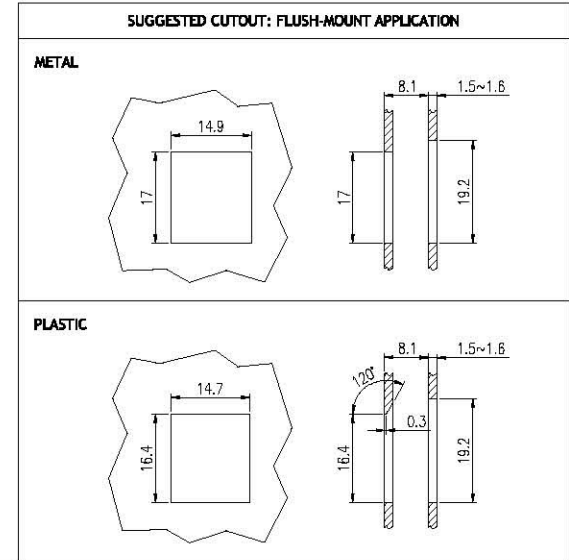

DRAWN BY Ethan Wu				
APPROVED BY Jerry Su				
DIMENSIONS ARE MM [IN]				
TOLERANCES:				
~20	~50	~150	150~	ANGLE
±0.2	±0.4	±0.5	±1.5	Z'
3rd Angle Projection				

Mars Networking Inc.			
TITLE USB3.0 A-A Coupler			
DWG. NO. KJ-USAA3-XX			REV. 1
CUSTOMER PARTS NO.			
DATE 2012.09.13	SCALE 1:1	SHEET 1/1	