


PIN OUT

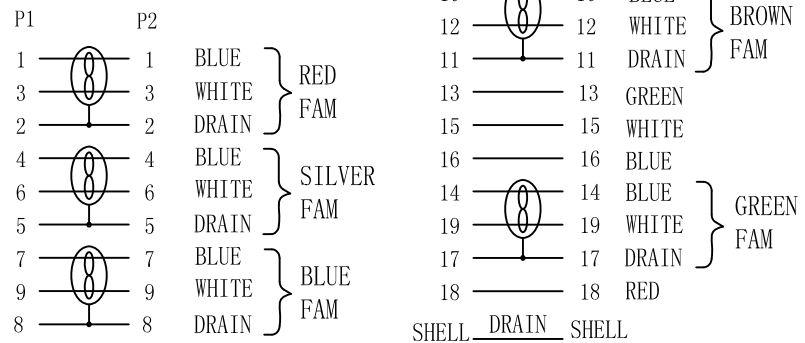

NOTES:

1.ELECTRICAL PROPERTIES:

- 1.1 100% OPEN AND SHORT TEST
- 1.2 CONDUCTOR RESISTANCE: 5 OHMS
- 1.3 INSULATION RESISTANCE: 10 MEGOHMS
- 1.4 HI-POT: DC300V/0.01S
- 1.5 100% HDTV, BLUE RAY DVD TEST(1080P)
- 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.

2. ALL MATERIAL BE RoHS COMPLIANT.

| NO. | PARTS NAME | Q' TY | SPECIFICATION |
|-----|------------|-------|--|
| ⑥ | TAG | 1PCS | HDMI [®] HIGH SPEED WITH ETHERNET TAG |
| ⑤ | TAG | 1PCS | DELTA TAG |
| ④ | HOOD MOLD | 2PCS | WHITE ABS SHELL |
| ③ | INNER MOLD | 2PCS | PE |
| ② | HDMI 19M | 2PCS | GOLD PLATED SHELL |
| ① | CABLE | 1PCS | (36AWG*1P+D+FAM)*5+36AWG*4C+AEB OD:4.2mm±0.2mm WHITE PVC JACKET HIGH SPEED HDMI [®] CABLE WITH ETHERNET |

| | | | | |
|----------|---------|-------|-----------|--------------|
| APPROVED | CHECKED | DRAWN | CUSTOMER: | |
| | | | ITEM NO. | HDMI-1092A-K |
| | | | DRAW NO. | |
| | | | UNIT | mm |
| | | | SCALE | NONE |

DESCRIPTION:

HDMI 19PIN/M-HDMI 19PIN/M

