


312 Mercury-Free Engineering Data sheet

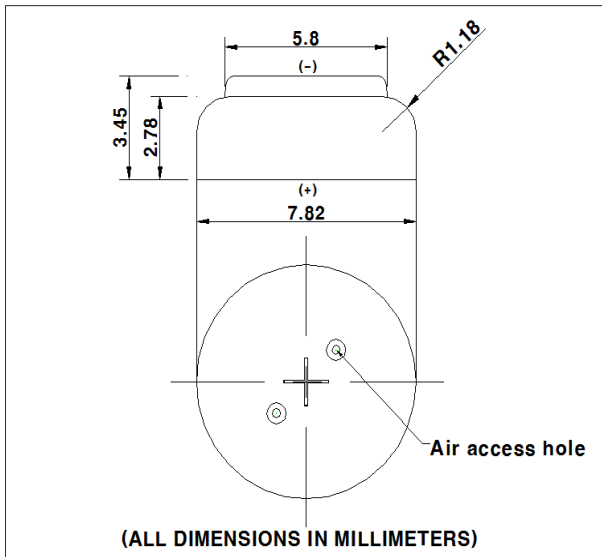

SPECIFICATIONS


Type designation :	312DS
Nominal voltage :	1.45V
Typical capacity:	165mAh
(Rated at 1.2mA continuous & 5mA / 100ms Pulses at 25°C 60%)	
Average weight :	0.53g
Operating Temp :	-10°C ~ 50°C
Impedance :	≤5Ω (at AC 1KHz)
Available current :	10mA at 1.1V
IEC :	PR41
Terminals :	FLAT
Shelf life :	4 years

(Discharge Charts of IEC 60086-2:2011 Standards)

312 [Mercury Free Standard Test]

Pulsed load : 1,2 mA continuous & 5,0 mA/100ms Pulses


Pulse interval : 2,0 h Temp./RH : 25/60

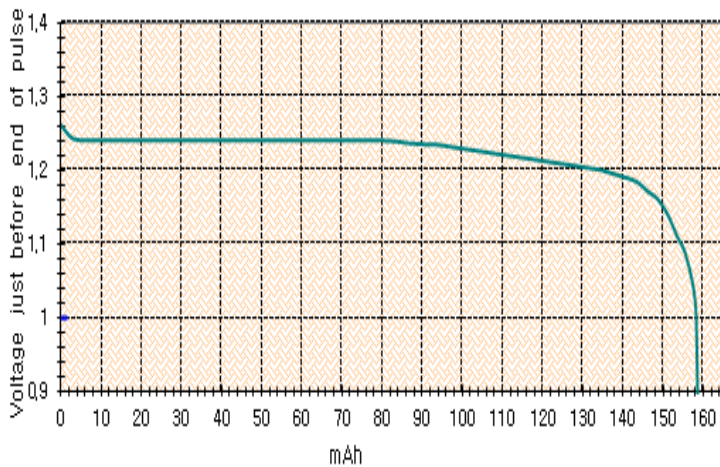

312 [Mercury Free High Drain Test]

Pulsed load : 2,0 mA continuous & 10,0 mA/100ms Pulses

Pulse interval : 2,0 h Temp./RH : 25/60

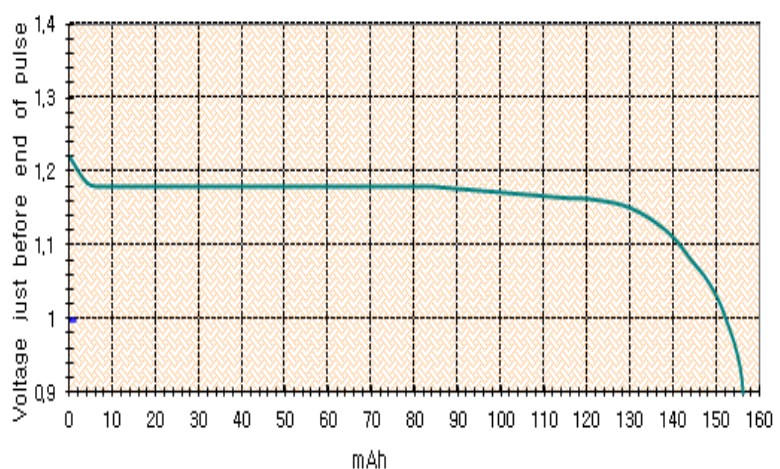

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication

Contents herein do not constitute a warranty.

Copyright iCellTech Corp. – All Rights Reserved