


Geberit PE kuglegrenrør 88,5° dobbelt, tilslutninger 90° forskudt



Eksempelbillede

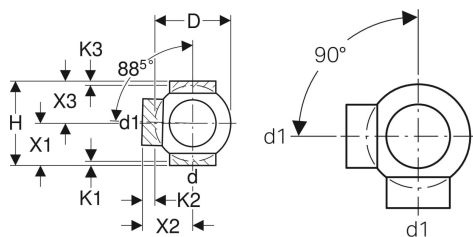

Anvendelser

- Til afløb fra bygninger

Tekniske data

Materiale

PE-HD

Egenskaber

- UV-beständig

Varenr.	VVS nr.	DN	d, ø	d1, ø	arc	arc2	D	H	X1	X2	X3	K1	K2	K3
365.325.16.1		70 / 70	75 mm	75 mm	88.5 °	90 °	12 cm	16 cm	8 cm	10 cm	8 cm	1.5 cm	3.5 cm	1.5 cm
366.330.16.1		90 / 90	90 mm	90 mm	88.5 °	90 °	14 cm	18 cm	9 cm	11 cm	9 cm	2 cm	4 cm	2 cm
367.315.16.1		100 / 56	110 mm	56 mm	88.5 °	90 °	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.320.16.1		100 / 60	110 mm	63 mm	88.5 °	90 °	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.325.16.1	184086308	100 / 70	110 mm	75 mm	88.5 °	90 °	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.330.16.1	184086309	100 / 90	110 mm	90 mm	88.5 °	90 °	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.335.16.1	184076310	100 / 100	110 mm	110 mm	88.5 °	90 °	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	4 cm	1.5 cm