



# MASTERColour CDM-T Elite



## MASTERColour CDM-T Elite 150W/930 G12 1CT/12

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information	
Cap-Base	G12 [ G12]
Operating Position	P10 [ Parallel +/-10D or Horizontal(HOR)]
Life to 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	10000 h
Life to 20% Failures (Nom)	11000 h
Life to 50% Failures (Nom)	12000 h
ANSI Code HID	-
Flux measurement reference	Sphere
Light technical	
Color Code	930 [ CCT of 3000K]
Luminous Flux (Nom)	14600 lm

Luminous Flux (Rated) (Nom)	14600 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 12000 h (Nom)	73 %
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	91 %
Lumen Maintenance 4000 h (Nom)	86 %
Lumen Maintenance 5000 h (Nom)	84 %
Chromaticity Coordinate X (Nom)	0.434
Chromaticity Coordinate Y (Nom)	0.398
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	98 lm/W
Color Rendering Index (Min)	89

# MASTERCcolour CDM-T Elite

Color Rendering Index (Nom)	92
<b>Operating and electrical</b>	
Power (Nom)	150.1 W
Lamp Current Run-Up (Max)	2.5 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	86 V
Voltage (Nom)	92 V
<b>Controls and dimming</b>	
Dimmable	No
Run-Up Time 90% (Max)	3 min
<b>Mechanical and housing</b>	
Bulb Finish	Clear
Bulb Shape	T19 [ T 19mm]
<b>Approval and application</b>	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	9.5 mg
Mercury (Hg) Content (Nom)	9.5 mg
Energy Consumption kWh/1000 h	151 kWh
EPREL Registration Number	473357

## UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3


## Luminaire design requirements

Bulb Temperature (Max)	650 °C
Cap-Base Temperature (Max)	280 °C
Cap-Base Temperature (Max)-DUP(do not use)	536 °F
Pinch Temperature (Max)	350 °C
Pinch Temperature (Max)-DUP(do not use)	350 °C

## Product data

Full product code	871150021312915
Order product name	MASTERCcolour CDM-T Elite 150W/930 G12 1CT/12
EAN/UPC - Product	8711500213129
Order code	928094705125
Numerator - Quantity Per Pack	1
Local code description	LAMP VAPOR MET CDM CDMT-EL150W930
Numerator - Packs per outer box	12
Material Nr. (12NC)	928094705125
Net Weight (Piece)	0.031 kg
ILCOS Code	MT/UB-150/930-H-G12-21/100

## Dimensional drawing






MASTERColour CDM-T Elite 150W/930 G12 1CT/12

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-T Elite 150W/930 G12 1CT/12	20 mm	9 mm	55 mm	57 mm	56 mm	110 mm



# MASTERCoulour CDM-T Elite

## Photometric data

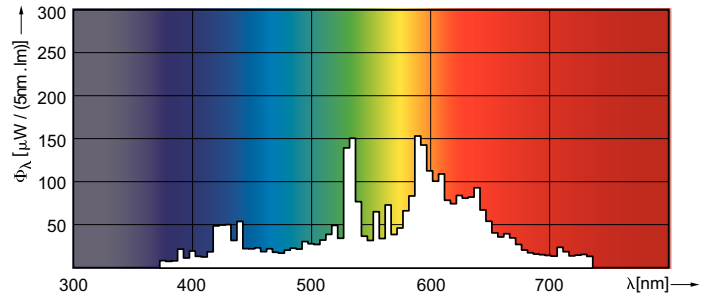

LDPO\_CDM-T-E\_150W\_930-Spectral power distribution Colour

## Lifetime

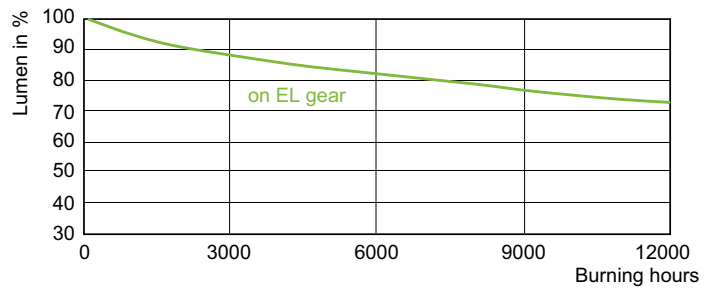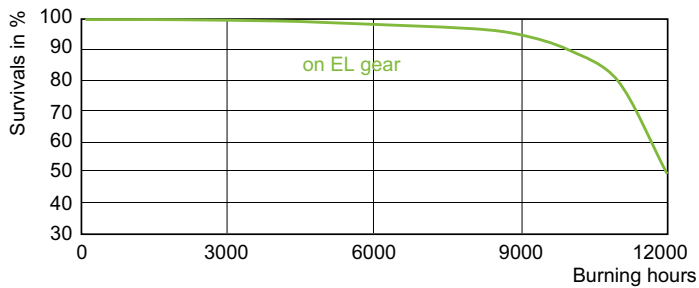

LDLE\_CDM-T-E\_150W\_930-Life expectancy diagram

