


| PIN OUT | | | |
|---------|---|-------------------|--------------|
| CN1 | | CN2 | COLOR |
| 1 | — | 1 | WHITE/ORANGE |
| 2 | — | 2 | ORANGE |
| 3 | — | 3 | WHITE/GREEN |
| 6 | — | 6 | GREEN |
| 4 | — | 4 | BLUE |
| 5 | — | 5 | WHITE/BLUE |
| 7 | — | 7 | WHITE/BROWN |
| 8 | — | 8 | BROWN |
| SHIELD | — | SHIELD DRAIN WIRE | |

PAIR

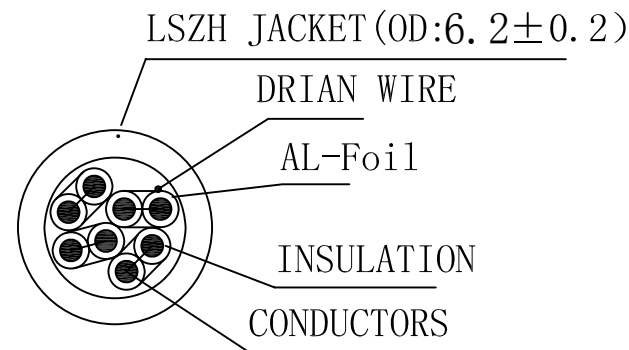

SECTION A-A

- 1.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 1.2 100% OPEN AND SHORT TEST.
- 1.3 ALL PRODUCTS PASS TIA CAT 6A CHANNEL TEST
- 1.4 TEMPERATURE RANGE:-20—+60℃

| ③ | MOLDING | 2PCS | BLACK PVC |
|-----|------------|-------|--|
| ② | CONNECTER | 2PCS | RJ45 (8P8C) MALE WITH METAL SHIELD (NICKEL PLATED), GOLD PLATED PINS |
| ① | CABLE | 1PCS | (26AWG*1PR+AL-Foil)*4+DRAIN WIRE+BLACK LSZH JACKET |
| NO. | PARTS NAME | Q' TY | SPECIFICATION |

| APPROVED | CHECKED | DRAWN | CUSTOMER: | |
|----------|---------|-------|-----------|-----------|
| | | | ITEM NO. | STP-60SAU |
| | | | DRAW NO. | |
| | | | UNIT | mm |
| | | | SCALE | NONE |

DESCRIPTION:
RJ45 (8P8C) M/M, U/FTP, CAT6A 0.5m

