
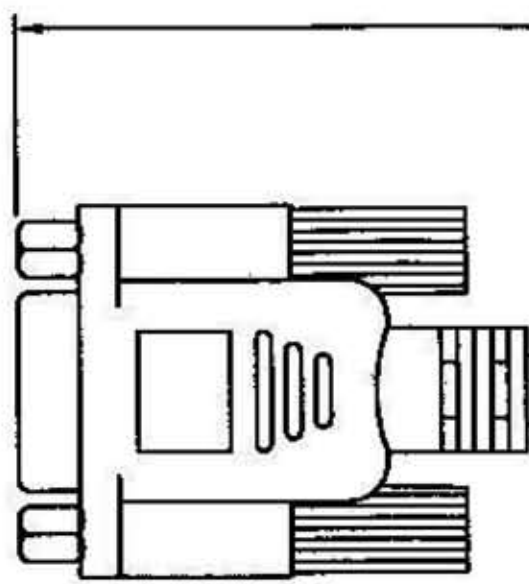



LTR	RevNo	Revision note	Date	Signature	Checked
⚠	2.0	ADD ITEM NO.:DEL-34A/DEL-34B	08/27/03		

DB9 FEMALE
INSULATOR:BLUE

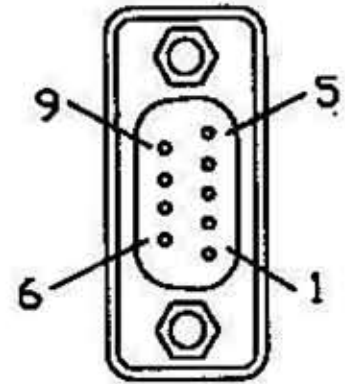


MOLDED TYPE
COLOR: BEIGE

3000±50MM

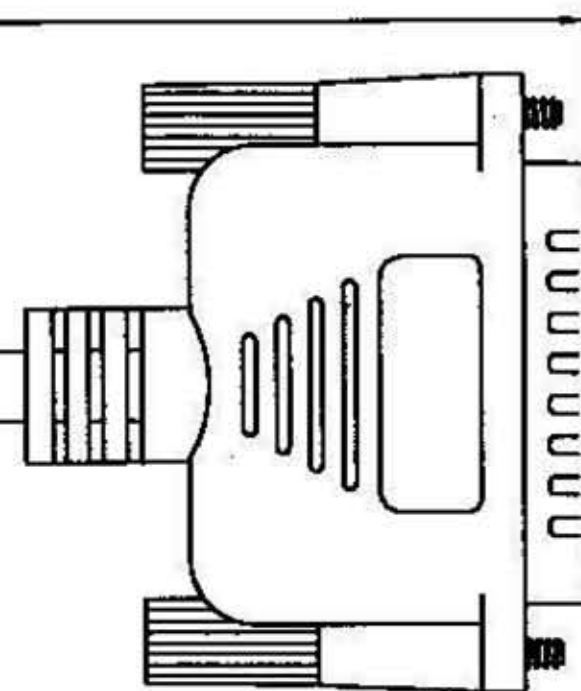

MOLDED TYPE
COLOR: BEIGE

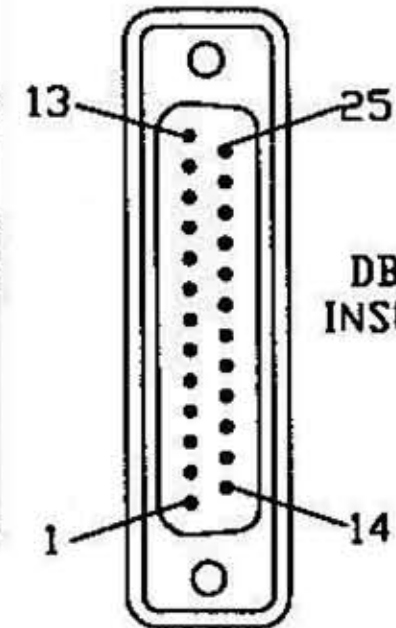

DB25 MALE
INSULATOR:BLUE

NOTE:
1.CABLE AND MOLDED COLOR: BEIGE
2.TEST:OPEN/SHORT 100% TEST
3.PACKING:W/ZIPLOCK BAG+STICKER-BAR CODE
4.ITEM NO. & LENGTH:

ITEM NO.	LENGTH
DEL-34	3000±50MM
DEL-34A	5000±100MM
DEL-34B	10000±100MM

CONFIGURATION

DB9F	DB25M
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHIELD	SHIELD

NO.	PART NAME	Q'TY	SPECIFICATION
5.	HEX.NUT	2	#4-40UNC TYPE FOR DB9 FEMALE
4.	THUMB SCREW	4	#4-40UNC TYPE
3.	CONNECTOR	1	DB25 MALE MOLDED TYPE
2.	CONNECTOR	1	DB9 FEMALE MOLDED TYPE
1.	CABLE	1	#30,NO-UL 9C+1 W/OBRAID. O.D:5.0MM BEIGE PVC JACKET

RANGE	0-10	11-25	26-40	41-60	61-80	81-100	X
TOLERANCE(±)	0.10	0.15	0.20	0.25	0.30	0.35	2%
TITLE:	DB9 F/DB25 M MOLDED TYPE		Buyer	Date	Unit	Rev.	Dwg no.
			DEL	2012.7.09	mm	2.0	DEL-34 SERIES
DRN BY	CHK BY	APE BY					