

Product Environmental Profile

Motor circuit breaker, TeSys Deca, rotary handle






General information

| | |
|-----------------------------------|--|
| Representative product | Motor circuit breaker, TeSys Deca, rotary handle - GV2P22 |
| Description of the product | The main purpose of the product is to protect three-phase motors, the cables, the people, against short circuits and overloads. |
| Functional unit | Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 690V AC and rated current 25A. This protection is ensured in accordance with the following parameters: - Number of poles 3p - Rated breaking capacity 4KA |



Constituent materials

Reference product mass 327 g including the product, its packaging and additional elements and accessories

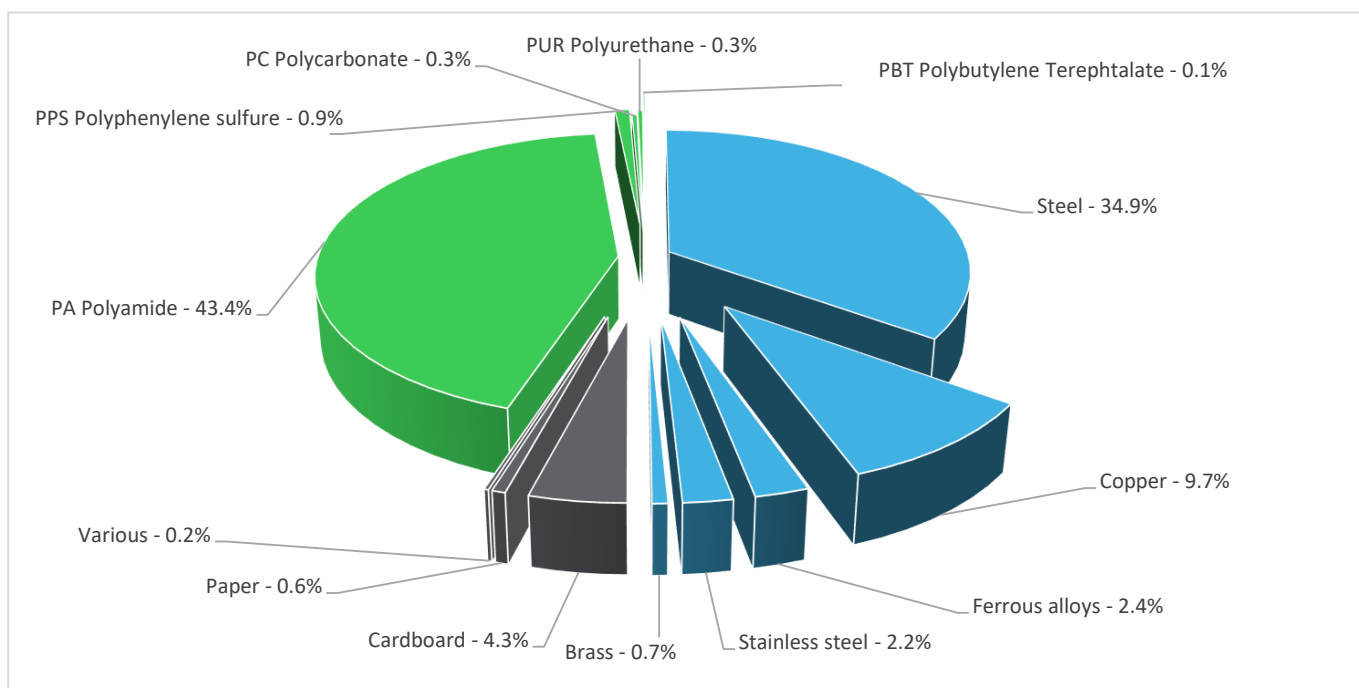

| | |
|----------|-------|
| Plastics | 45.0% |
| Metals | 49.9% |
| Others | 5.1% |



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Motor circuit breaker, TeSys Deca, rotary handle presents the following relevant environmental aspects


| | |
|----------------------|---|
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified |
| Distribution | Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 14 g, consisting of cardboard (100%) |
| Installation | Ref GV2P22 does not require any installation operations. |
| Use | The product does not require special maintenance operations. |
| End of life | <p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>This product contains Plastic parts with brominated FR(32.26g) that should be separated from the stream of waste so as to optimize end-of-life treatment.</p> <p>The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website</p> <p>http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</p> <p>Recyclability potential: 56% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p> |



Environmental impacts

| | | | | |
|---|---|---|---|---|
| Reference life time | 20 years | | | |
| Product category | Circuit-breakers | | | |
| Installation elements | No special components needed | | | |
| Use scenario | Load rate: 50% of In Use time rate: 30% of RLT | | | |
| Geographical representativeness | Europe | | | |
| Technological representativeness | The main purpose of the product is to protect three-phase motors, the cables, the people, against short circuits and overloads. | | | |
| Energy model used | Manufacturing | Installation | Use | End of life |
| | Energy model used: France | Electricity mix; AC; consumption mix, at consumer; 230V; FR | Electricity mix; AC; consumption mix, at consumer; 230V; FR | Electricity mix; AC; consumption mix, at consumer; 230V; FR |

| Compulsory indicators | | Motor circuit breaker, TeSys Deca, rotary handle - GV2P22 | | | | | |
|--|-------------------------------------|---|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 4.52E-03 | 4.52E-03 | 0* | 0* | 3.31E-06 | 0* |
| Contribution to the soil and water acidification | kg SO ₂ eq | 1.66E-02 | 3.39E-03 | 1.93E-04 | 3.16E-06 | 1.29E-02 | 9.39E-05 |
| Contribution to water eutrophication | kg PO ₄ ³⁻ eq | 4.66E-03 | 1.00E-03 | 4.44E-05 | 7.67E-07 | 3.58E-03 | 2.58E-05 |
| Contribution to global warming | kg CO ₂ eq | 1.32E+01 | 1.88E+00 | 4.22E-02 | 0* | 1.13E+01 | 4.79E-02 |
| Contribution to ozone layer depletion | kg CFC11 eq | 9.84E-07 | 1.33E-07 | 0* | 0* | 8.48E-07 | 2.10E-09 |
| Contribution to photochemical oxidation | kg C ₂ H ₄ eq | 1.83E-03 | 4.19E-04 | 1.37E-05 | 2.36E-07 | 1.39E-03 | 9.83E-06 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m3 | 7.06E-01 | 4.94E-01 | 0* | 0* | 2.12E-01 | 0* |
| Total Primary Energy | MJ | 1.47E+03 | 3.42E+01 | 5.97E-01 | 0* | 1.43E+03 | 4.58E-01 |

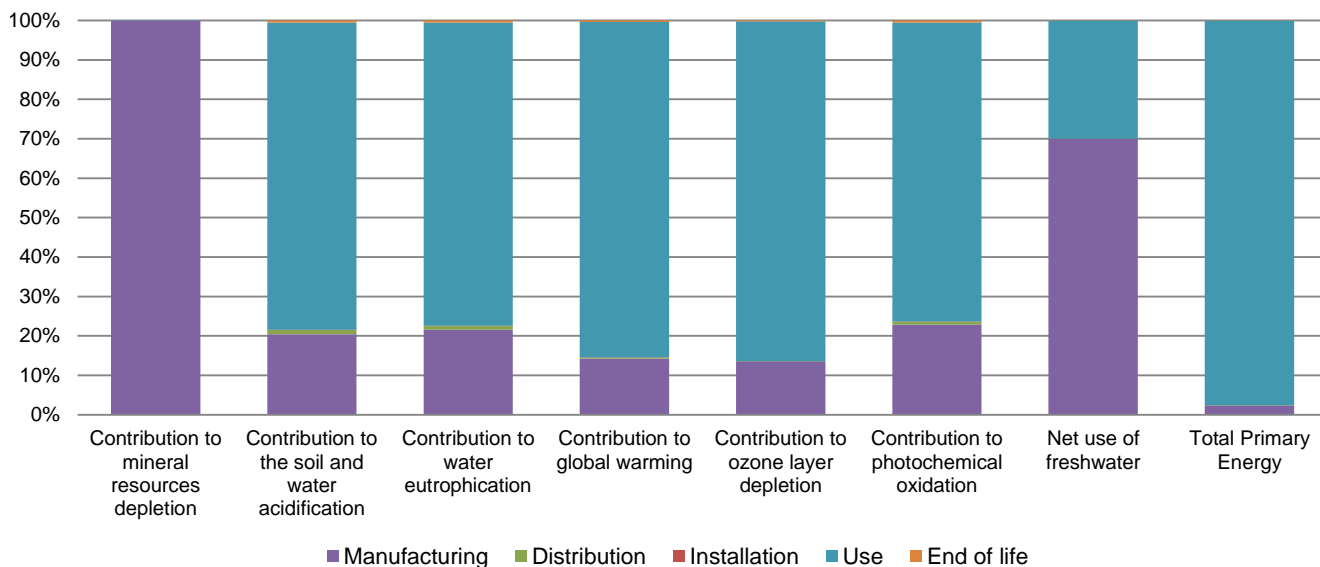

| Optional indicators | | Motor circuit breaker, TeSys Deca, rotary handle - GV2P22 | | | | | |
|---|------|---|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 1.81E+02 | 2.44E+01 | 5.93E-01 | 0* | 1.55E+02 | 3.68E-01 |
| Contribution to air pollution | m³ | 1.31E+03 | 4.67E+02 | 1.79E+00 | 0* | 8.39E+02 | 3.31E+00 |
| Contribution to water pollution | m³ | 1.34E+03 | 7.14E+02 | 6.94E+00 | 0* | 6.16E+02 | 3.94E+00 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 5.62E-03 | 5.62E-03 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 1.15E+00 | 9.29E-01 | 7.95E-04 | 0* | 2.19E-01 | 5.09E-04 |
| Total use of non-renewable primary energy resources | MJ | 1.47E+03 | 3.33E+01 | 5.96E-01 | 0* | 1.43E+03 | 4.58E-01 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 8.38E-01 | 6.17E-01 | 7.95E-04 | 0* | 2.19E-01 | 5.09E-04 |
| Use of renewable primary energy resources used as raw material | MJ | 3.12E-01 | 3.12E-01 | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 1.46E+03 | 2.93E+01 | 5.96E-01 | 0* | 1.43E+03 | 4.58E-01 |
| Use of non renewable primary energy resources used as raw material | MJ | 3.99E+00 | 3.99E+00 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Hazardous waste disposed | kg | 3.34E+01 | 1.65E+01 | 0* | 0* | 1.65E+01 | 4.50E-01 |
| Non hazardous waste disposed | kg | 2.47E+00 | 1.38E+00 | 1.50E-03 | 0* | 1.08E+00 | 1.41E-03 |
| Radioactive waste disposed | kg | 1.18E-02 | 5.50E-04 | 0* | 0* | 1.13E-02 | 2.21E-06 |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 2.22E-01 | 3.20E-02 | 0* | 1.39E-02 | 0* | 1.77E-01 |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 6.11E-03 | 0* | 0* | 0* | 0* | 6.11E-03 |
| Exported Energy | MJ | 4.43E-05 | 4.16E-06 | 0* | 4.01E-05 | 0* | 0* |

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2022-01 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| | | | |
|--|------------------|--|--|
| <i>Registration number</i> | ENVPEP2211002_V1 | <i>Drafting rules</i> | PCR-ed3-EN-2015 04 02 |
| <i>Date of issue</i> | 12/2022 | <i>Supplemented by</i> | PSR-0005-ed2-EN-2016 03 29 |
| <i>Validity period</i> | 5 years | <i>Information and reference documents</i> | www.pep-ecopassport.org |
| <i>Independent verification of the declaration and data</i> | | | |
| Internal | X | External | |
| <i>The elements of the present PEP cannot be compared with elements from another program.</i> | | | |
| <i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i> | | | |

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP2211002_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

12/2022